



Neutrosophic Approach to Grayscale Images Domain

A. A. Salama¹, Florentin Smarandache² and Hewayda ElGhawalby³

¹Department of Mathematics and Computer Science, Faculty of Science, Port Said University, Egypt
E-mails : drsalama44@gmail.com

²Department of Mathematics, University of New Mexico, 705 Gurley Avenue, Gallup, NM 87301, USA.
E-mail: fsmarandache@gmail.com

³Department of Physics and Engineering Mathematics, Faculty of Engineering, Port Said University, Egypt.

Abstract. In this paper, we propose a new technique for the enhancing images. It will work on removing the noise contained in the image as well as improving its contrast based on three different enhancing transforms, we commence by embedding the image into a neutrosophic domain; where the image will be mapped in three different levels, a level of trueness, a level of false-ness and a level of indeterminacy. Hence, we act separately on each level using the enhancement transforms. Finally, we introduce a new analysis in the field of analysis and processing of images using the neutrosophic crisp set theory via Mat lab program where has been obtained three images, which helps in a new analysis to improve and retrieve images.

Keywords: Image analysis, Image Enhancement, Image processing, Neutrosophic Crisp Set, Gaussian Distribution, Logarithmic Transform, Neutrosophic Crisp Mathematical Morphology

1. Introduction

As a discipline, neutrosophic is an active and growing area of image processing and analysis. Mathematically, a gray scale image is represented by an $m \times n$ array $I_m = [g(i, j)]_{m \times n}$ with entities $g(i, j)$ corresponding to the intensity of the pixel located at (i, j) . Presently applications require different kinds of images as sources of information for interpretation and analysis. Whenever an image is converted from one form to another (such as digitizing, scanning, transmitting, storing, etc.) some form of declination occurs at the output. Hence, the output image has to undergo a process called image enhancement which consists of a collection of techniques that seek to improve the visual appearance of an image [12]. Image enhancement is a process which mainly used to improve the quality of images, removing noise from the images. It has important role in many fields like high definition TV (HDTV), X-ray processing, motion detection, remote sensing and in studying medical images [8]. The fundamental concepts of neutrosophic set, introduced by Smarandache in [22, 23] and many applications, introduced by Salama et al. in [14-21], [27, 28] provides a natural foundation for treating mathematically the neutrosophic phenomena which exist pervasively in our real world and for building new branches of neutrosophic mathematics, as an extension of the concept of the fuzzy set theory introduced by Zadeh [25].

2. Preliminaries

we recall some definitions for essential concepts of neutrosophic sets and its operations, which were introduced by Smarandache in [22, 23] and many applications by Salama et al. in [14-21].

2.1. Image Enhancement

Recent applications are in need of different kinds of images as a source of information for interpretation and analysis. Whenever an image is transformed from one structure to another, such as: digitizing, scanning, and transmitting, some kind of distortion might occur to the output image. Hence, a process called image enhancement must be done. The process of an image enhancement contains a collection of techniques with the aim of providing a better visual appearance of the image; it is to improve the image quality so that the

resultant image is better than the original image for a specific application. In other words, to convert the image to an appropriate form for analysis by either a human eye or a machine. Currently, the image enhancement research covers wide topics such as: algorithms based on the human visual system [6], histograms with hue-preservation [9], JPEG-based enhancement for the visually impaired [24], and histogram modification techniques [5]. Additive noise, Gaussian noise, Impulse noise and Poisson noise represent several types of noises that corrupt the image, to remove any of such there are various filters available. For instance: Gaussian filter, Median filter, High pass filter and Low pass filter; each of these can be used to remove the image noise and, hence, enhance the image. The applications of image enhancement are in every field where images are needed to be understood and analyzed, as in medical image analysis, and analysis of images from satellites. Generally, the enhancement techniques can be categorized into two main groups, which are the Spatial Domain Methods and the Frequency Domain Methods [26].

2.2. Spatial Domain for Image Enhancement

The spatial domain is the normal image space, which is a direct handling of image pixels [2]. It is the manipulation or the change of image representations. Moreover, spatial domain is used in several applications as smoothing, sharpening and filtering images. Spatial domain techniques such as the logarithmic transforms[7], power law transforms[11], and histogram equalization[13], are basically to perform on the direct manipulation of the image pixels. In practice, spatial techniques are useful for directly changing the gray level intensities of individual pixels and consequently the contrast of the entire image. Usually, the spatial domain techniques enhance the whole image uniformly, which in various cases produces undesirable results and do not make it possible to efficiently enhance edges or other required information.

2.3 Frequency Domain for Image Enhancement

While in the spatial domain an image is treated as it is, and the value of the pixels of the image changes with respect to the scene, in the frequency domain we are dealing with the rate at which the values of the pixel are changing in the spatial domain. In all the methods applied, a Fourier transform of the image is firstly computed so that the image is transferred into the frequency domain. Hence, any operation used for the purpose of image enhancement will be performed on the Fourier transform of the image. Afterward an Inverse Fourier transform is performed to obtain the resultant image. The main objective of all the enhancement operations is to modify the image contrast, brightness or the grey levels distribution. Therefore, the value of the pixels of the output image will be changed according to the transformation applied on the input values. In image processing and image analysis, the image transform is a mathematical tool which is used for detecting the rough or unclear area in the image and fix it. The image transformation allows us to move from frequency domain to time domain to perform the desired task in an easy manner. Various types of image transforms are available such as Fourier Transform [1], Walsh Transform [10], Hadamard Transform, Stant Transform, and Wavelet Transform [4]. The image transformation to neutrosophic domain in [3]

3. Hesitancy Degrees with Neutrosophic Image Domain

Salama et al. in [27, 28] presented the texture features for images embedded in the neutrosophic domain with Hesitancy degree.

Definition 3.1 [15,27,28]:

Let $A = \{(\mu_A(x), \nu_A(x), \gamma_A(x)), x \in X\}$ on $X = \{x_1, x_2, x_3, \dots, x_n\}$. Then for a Neutrosophic set $A = \{(\mu_A(x), \nu_A(x), \gamma_A(x)), x \in X\}$ in X , We call $\pi_A(x) = 3 - \mu_A(x) - \nu_A(x) - \gamma_A(x)$, the Neutrosophic index of x in A , It is a hesitancy degree of x to A it is obvious that

$$0 \leq \pi_A(x) \leq 3.$$

In this section we are transforming the image I_m into a neutrosophic domain using four functions: T , I , F and π . A pixel $P(i, j)$ in the image is described by a forth $(T(i, j); I(i, j); F(i, j); \pi(i, j))$. Where $T(i, j)$ is the membership degree of the pixel in the white set, and $F(i, j)$ is its membership degree in the non-white (black) set; while $I(i, j)$ is how much it is neither white nor black; k and $\pi(i, j)$ is hesitancy degree. The values of $T(i, j)$, $I(i, j)$, $F(i, j)$ and $\pi(i, j)$ are defined as follows:

$$T(i, j) = \frac{\bar{g}(i, j) - \bar{g}_{\min}}{\bar{g}_{\max} - \bar{g}_{\min}}, \quad I(i, j) = 1 - \frac{\delta(i, j) - \delta_{\min}}{\delta_{\max} - \delta_{\min}},$$

$$F(i, j) = 1 - T(i, j),$$

$\pi(i, j) = 3 - (T(i, j) + I(i, j) + F(i, j))$, where $\bar{g}(i, j)$ is the local mean intensity in some neighborhood w of the pixel,

$$\bar{g}(i, j) = \frac{1}{w \times w} \sum_{u=i-w/2}^{u=i+w/2} \sum_{v=j-w/2}^{v=j+w/2} g(u, v), \quad \delta(i, j) \text{ is the homogeneity value computed by the absolute value of difference between the}$$

intensity and its local mean value $\delta(i, j) = \text{abs}(g(i, j) - \bar{g}(i, j))$.

4. A Neutrosophic Image Enhancement Filter

Consider an Image G in the neutrosophic domain with four functions (T, I, F, π) describing the three levels of trueness, indeterminacy and falseness with hesitancy degree as previously explained in 2. The filter we propose to enhance G is two fold. In one hand it aims to remove the noise from the image, in the other hand it improves the image contrast. To do so, we will work on each level separately.

Firstly, in the indeterminacy level, we will force the stability of this blur area around the mean using the Gaussian distribution.

A general form of the Gaussian distribution is $\phi\left(\frac{t-\mu}{\sigma}\right)$, where σ is the standard deviation and μ is the mean value. Secondly, in the

falseness level, a logarithmic transform is applied to enhance the details in ; 2 the dark areas while considering the brighter ones. Its general form is, $c \log(1 + t)$, where t is assumed to be non-negative; $t \geq 0$, and c is a scaling parameter.

Thirdly, a power-law transform is working over the shattered areas in the trueness level. The power law transformations include the n^{th} power and the n^{th} root transformation, these transformations are also known as gamma transformation and can be given by the general expression, cr^γ . Variation in the value of γ varies the enhancement of the images. Finally, we have got the output image, \bar{G} of the

enhancement process with the triple $(\bar{T}, \bar{I}, \bar{F}, \bar{\pi})$ where

$$\bar{T}(i, j) = CT^\gamma(i, j),$$

$$\bar{I}(i, j) = \frac{1}{\sigma\sqrt{2\pi}} \exp\left(-\frac{(I(i, j) - \mu)^2}{2\sigma^2}\right), \quad (2)$$

$$\bar{F}(i, j) = C \ln(1 + F(i, j)),$$

$$\bar{\pi} = 3 - (\bar{T}(i, j) + \bar{I}(i, j) + \bar{F}(i, j))$$

5. A Neutrosophic Crisp Operators for Grayscale Image

5.1. Grayscale Image via Neutrosophic Crisp Domain.

In this section, we introduce a new analysis in the field of analysis and processing of images using the neutrosophic crisp set theory due to Salama et al. in [14,17] via Matlab program where has been obtained three images representing, which helps in a new analysis to improve and retrieve images

A grayscale image in a 2D Cartesian domain




Fig. 1: a) Grayscale image

The following figure shows a grayscale image in a neutrosophic crisp components.



Fig. 1: b) Neutrosophic Crisp Components (A_1, A_2, A_3) respectively

At this point, we have noticed that there exist some crisp sets which having the neutrosophic triple structure and are not classified in either categories of the neutrosophic crisp sets' classification. In this case, the three components of those sets may overlap. In this section, we deduced a new triple structured set; where the three components are disjoint.

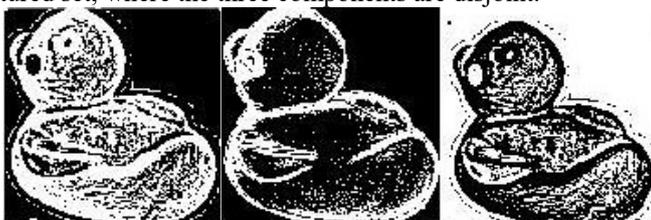


Fig. 2: b) Neutrosophic Crisp Components (A_1, A_2, A_3) respectively

The following figure shows a grayscale image in star neutrosophic crisp components.

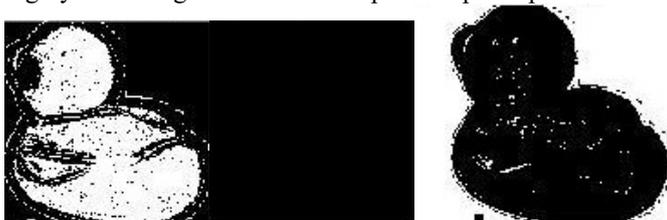


Fig. 3 b) Star Neutrosophic Crisp Components (A_1, A_2, A_3) respectively

Definition 5.1

For any triple structured crisp set A , of the form $A = (A_1, A_2, A_3)$; the retract neutrosophic crisp set A^r is the structure $A^r = (A_1^r, A_2^r, A_3^r)$, where

$$A_1^r = A_1 \cap co(A_2 \cup A_3), A_2^r = A_2 \cap co(A_1 \cup A_3)$$

$$A_3^r = A_3 \cap co(A_1 \cup A_2), \text{ Furthermore, the three components } A_1^r, A_2^r \text{ and } A_3^r \text{ are disjoint and } A_i^r \subseteq A_i, \forall i = 1,2,3. \text{ and}$$

The following figure shows a grayscale image in a neutrosophic retract crisp components.

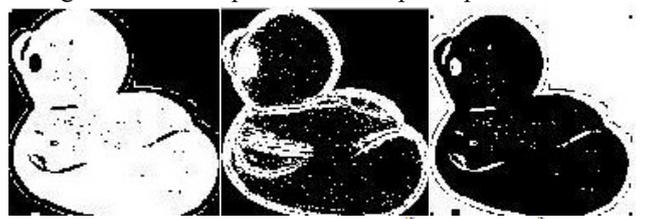


Fig.4: b) Neutrosophic Retract Components (A_1, A_2, A_3) respectively

5.2. A Grayscale Image & Neutrosophic Crisp Operators

Salama et al. [17] extended the definitions of some morphological filters using the neutrosophic crisp sets concept. The idea behind the new introduced operators and filters is to act on the image in the neutrosophic crisp domain instead of the spatial domain. The following figure shows a grayscale image in a neutrosophic crisp Dilation components.

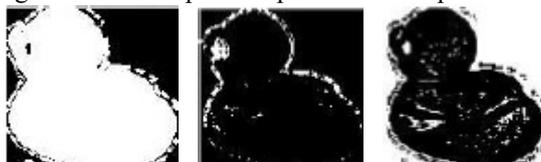


Fig.5: Neutrosophic Crisp Dilation components in type 1 (A_1, A_2, A_3) respectively



Fig.6: Neutrosophic Crisp Dilation components in type 2 (A_1, A_2, A_3) respectively

The following figure shows a grayscale image in a neutrosophic crisp **Erosion** components.



Fig.7: Neutrosophic Crisp Erosion components in type 1 (A_1, A_2, A_3) respectively



Fig.8: Neutrosophic Crisp Erosion components in type2 (A_1, A_2, A_3) respectively

The following figure shows a grayscale image in a neutrosophic crisp **Opening** components.



Fig.9: Neutrosophic Crisp opening components in type1 (A_1, A_2, A_3) respectively



Fig.10: Neutrosophic Crisp opening components in type2 (A_1, A_2, A_3) respectively

The following figure shows a grayscale image in a neutrosophic crisp **Closing** components.



Fig.11: Neutrosophic Crisp closing components in type1 $\langle A^1, A^2, A^3 \rangle$ respectively



Fig.12: Neutrosophic Crisp closing components in type2 $\langle A^1, A^2, A^3 \rangle$ respectively

Conclusion

As a discipline, neutrosophic is an active and growing area of image processing and analysis. In this work, we introduce a neutrosophic technique for the image processing, analysis and enhancement. The two fold proposed technique aims to remove the noise from the image, as well as improving the image contrast. To commence, we construct the embedding of the image in the neutrosophic domain; in which the image is mapped into three different levels, describing the levels of trueness, falseness and indeterminacy. Using the Power-law, Logarithmic and Gaussian transforms, the proposed a technique acts on each level of the image separately. Our plan next is to experiment our technique on different types of images, such as medical images.

REFERENCES

- [1] S. Aghagolzadeh and O. Ersoy, Transform image enhancement. *Optical Engineering*, 31(3) (1992), 614-626.
- [2] B. Chanda, and D. Majumder, *Digital Image Processing and Analysis*. New Delhi: Prentice-Hall of India, 2002.
- [3] H. D Cheng,, Y. Guot, Y. Zhang, A Novel Image Segmentation Approach Based on Neutrosophic Set And Improved Fuzzy C-Means Algorithm, *World Scientific Publishing Company, New Math. and Natural Computation*, Vol. 7, No.1, 155-171, 2011.
- [4] D. L. Donoho and M. E. Raimondo, A fast wavelet algorithm for image deblurring. *ANZIAM J.* 46 (2005), C29 -C46.
- [5] J. Duan and G. Qiu, Novel histogram processing for colour image enhancement. *Third Intl. Conf. on Image and Graphics (Dec. 2004)*, 55-58.
- [6] K. Huang, Q. Wang and Z.Wu, Color image enhancement and evaluation algorithm based on human visual system. *Proc. IEEE ICASSP 3 (May 2004)*, iii 721-iii 724.
- [7] R. R. Jain, Kasturi and B. G. Schunck, *Machine Vision*. Mc Graw-Hill International Edition, 1995.
- [8] M. K. Khehra and M. Devgun, Survey on Image Enhancement Techniques for Digital Images. *Scholars Journal of Engineering and Technology (SJET)*; 2015; 3(2B):202-206.
- [9] S. K. Naik, and C. A. Murthy, Hue-preserving color image enhancement without gamut problem. *IEEE Trans. on Image Processing* 12, 12 (Dec. 2001), 1591-1598.
- [10] M. Petrou, and P. Bostdogianni, *Image Processing - The Fundamentals*. NewYork: Wiley, 1999.
- [11] W. K. Pratt, *Digital image processing*. Prentice Hall, 1989.
- [12] D. H. Rao, & P. P. Panduranga, A Survey on Image Enhancement Techniques: Classical Spatial Filter, Neural Network, Cellular Neural Network, and Fuzzy Filter. In *2006 IEEE International Conference on Industrial Technology*.
- [13] J. Russ, *The Image Processing Handbook*. CRC Press, 1992.
- [14] A. A. Salama, F.Smarandache, *Neutrosophic Crisp Set Theory*, Educational. Education Publishing 1313 Chesapeake, Avenue, Columbus, Ohio 43212(2015)
- [15] A. A. Salama, Florentin Smarandache and Mohamed Eisa, introduction to image processing via neutrosophic techniques, *Neutrosophic Sets and Systems*, (5), (2014) 59-64.
- [16] Haitham ELwahsha , Mona Gamala, A. A. Salama, I.M. El-Henawy, Modeling Neutrosophic Data by Self-Organizing Feature Map: MANETs Data Case Study, *Procida Computer*, Vol.121, pp152-157, 2017.
- [17] Eman.M.El-Nakeeb, Hewayda ElGhawalby, A.A. Salama, S.A.El-Hafeez: Neutrosophic Crisp Mathematical Morphology, *Neutrosophic Sets and Systems*, Vol. 16 (2017), pp. 57-69.
- [18] A. A. Salama, and F . Smarandache, Filters via Neutrosophic Crisp Sets, *NeutrosophicSets and Systems*, 1(1), (2013) pp.34-38.
- [19] A. A. Salama, Mohamed Eisa, Hewayda ElGhawalby, A. E. Fawzy, Neutrosophic Features for Image Retrieval, *Neutrosophic Sets and Systems*, vol. 13, 2016, pp. 56-61.
- [20] A. A Salama, Haitham A. El-Ghareeb, Ayman M. Manie, M. M Lotfy, Utilizing Neutrosophic Set in Social Network Analysis e-Learning Systems, *International Journal of Information Science and Intelligent System*, 3(4): (2014) 61-72.
- [21] A A Salama, Mohamed Eisa and A. E. Fawzy. A Neutrosophic Image Retrieval Classifier. *International Journal of Computer Applications* 170 (9): (2017) 1-6.
- [22] F. Smarandache, *Neutrosophy and Neutrosophic Logic*, First International Conference on Neutrosophy , Neutrosophic Logic , Set, Probability, and Statistics University of New Mexico, Gallup, NM 87301, USA(2002).

- [23] F. Smarandache. A Unifying Field in Logics: Neutrosophic Logic. Neutrosophic, Neutrosophic Set, Neutrosophic Probability. American Research Press, Rehoboth, NM, (1999).
- [24] Tang, J., Kim, J., and Peli, E. Image enhancement in the jpeg domain for people with vision impairment. *IEEE Trans. on Biomedical Engineering* 51, 11 (Nov. 2004), 2013-2023.
- [25] L. A. Zadeh, *Fuzzy Sets, Inform and Control* 8, (1965) 338-353.
- [26] C., J. Zhang, Wang, X. Wang and H. Feng, Contrast enhancement for image with incomplete beta transform and wavelet neural network. *Neural Networks and Brain* 2 (2005), 1236 -1241.
- [27] A. A. Salama, Hewayda ElGhawalby and A. E. Fawzy, Neutrosophic Image Retrieval with Hesitancy Degree, *New Trends in Neutrosophic Theories and Applications*, Vol.II Edited by Florentin Smarandache, Surapati Pramanik 2018, pp 237-242.
- [28] Arindam Dey, Said Broumi, Le Hoang Son, Assia Bakali, Mohamed Talea, Florentin Smarandache, "A new algorithm for finding minimum spanning trees with undirected neutrosophic graphs", *Granular Computing* (Springer), pp.1-7, 2018.
- [29] S Broumi, A Dey, A Bakali, M Talea, F Smarandache, LH Son, D Koley, "Uniform Single Valued Neutrosophic Graphs", *Neutrosophic sets and systems*, 2017.
- [30] S Broumi, A Bakali, M Talea, F Smarandache, A. Dey, LH Son, "Spanning tree problem with Neutrosophic edge weights", in *Proceedings of the 3rd International Conference on intelligence computing in data science*, Elsevier, science direct, Procedia computer science, 2018.
- [31] Said Broumi; Arindam Dey; Assia Bakali; Mohamed Talea; Florentin Smarandache; Dipak Koley, "An algorithmic approach for computing the complement of intuitionistic fuzzy graphs" 2017 13th International Conference on Natural Computation, Fuzzy Systems and Knowledge Discovery (ICNC-FSKD)
- [32] Abdel-Basset, M., Mohamed, M., Smarandache, F., & Chang, V. (2018). Neutrosophic Association Rule Mining Algorithm for Big Data Analysis. *Symmetry*, 10(4), 106.
- [33] Abdel-Basset, M., & Mohamed, M. (2018). The Role of Single Valued Neutrosophic Sets and Rough Sets in Smart City: Imperfect and Incomplete Information Systems. *Measurement*. [Volume 124](#), August 2018, Pages 47-55
- [34] Abdel-Basset, M., Gunasekaran, M., Mohamed, M., & Smarandache, F. A novel method for solving the fully neutrosophic linear programming problems. *Neural Computing and Applications*, 1-11.
- [35] Abdel-Basset, M., Manogaran, G., Gamal, A., & Smarandache, F. (2018). A hybrid approach of neutrosophic sets and DEMATEL method for developing supplier selection criteria. *Design Automation for Embedded Systems*, 1-22.
- [36] Abdel-Basset, M., Mohamed, M., & Chang, V. (2018). NMCDA: A framework for evaluating cloud computing services. *Future Generation Computer Systems*, 86, 12-29.
- [37] Abdel-Basset, M., Mohamed, M., Zhou, Y., & Hezam, I. (2017). Multi-criteria group decision making based on neutrosophic analytic hierarchy process. *Journal of Intelligent & Fuzzy Systems*, 33(6), 4055-4066.
- [38] Abdel-Basset, M.; Mohamed, M.; Smarandache, F. An Extension of Neutrosophic AHP-SWOT Analysis for Strategic Planning and Decision-Making. *Symmetry* 2018, 10, 116.
- [28] Abdel-Basset, Mohamed, et al. "A novel group decision-making model based on triangular neutrosophic numbers." *Soft Computing* (2017): 1-15. DOI: <https://doi.org/10.1007/s00500-017-2758-5>
- [39] Abdel-Baset, Mohamed, Ibrahim M. Hezam, and Florentin Smarandache. "Neutrosophic goal programming." *Neutrosophic Sets Syst* 11 (2016): 112-118.
- [40] El-Hefenawy, Nancy, et al. "A review on the applications of neutrosophic sets." *Journal of Computational and Theoretical Nanoscience* 13.1 (2016): 936-944.

Received: June 7, 2018. Accepted: July 5, 2018.